


A Standard Assembly



B Standard Horizontal Section

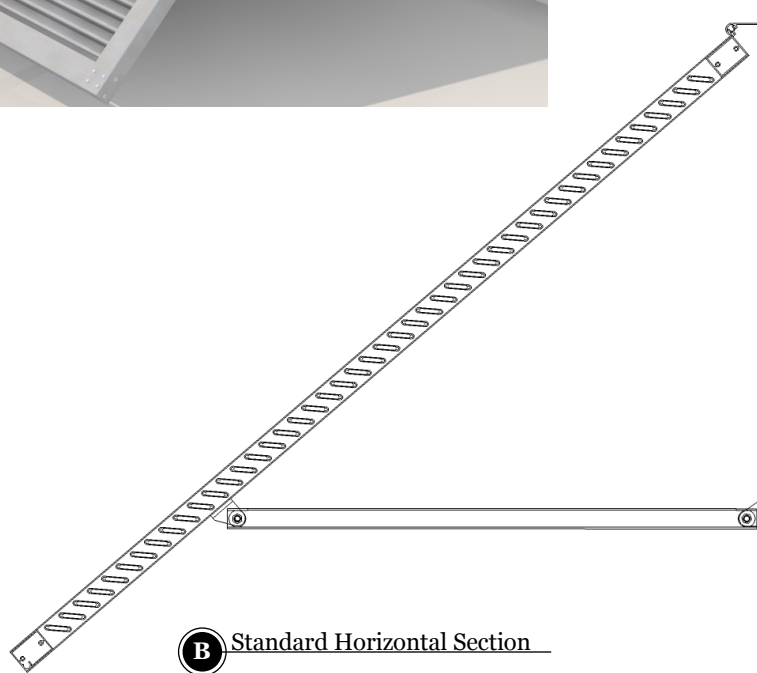

Product: OCEANIC (OC)

Aluminum Sunshade

STANDARD CONSTRUCTION

- **FRAME:**
2.575" x 1.62" x .071" EXTRUDED ALUMINUM (6063-T6)
- **SUPPORT RODS: (STRUT CONFIGURATION)**
1 1/2" SCHEDULE 40 ALUMINUM PIPE -
EXTRUDED ALUMINUM (6063-T6)
- **INFILL:**
LOUVER BLADE -
2" x .375" x .045" EXTRUDED ALUMINUM (6063-T6)
(CUSTOM SHAPES AND SIZES AVAILABLE)
- **WALL BRACKETS:**
6061-T6 EXTRUDED ALUMINUM
ELASTOMERIC COATING ON WALL FACING SURFACE
(CUSTOM BRACKETS AVAILABLE)
- **FINISH:**
ARCHITECTURAL POWDER COAT (RAL COLORS)
(ANODIZED AND KYNAR FINISHES AVAILABLE)
- **SITE SPECIFIC ENGINEERING:**
AVAILABLE UPON REQUEST

INSTALLATION

- OCEANIC SERIES ALUMINUM SUNSHADES SHOULD BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDED ATTACHMENT METHOD AND IN ACCORDANCE WITH STATE AND FEDERAL BUILDING CODES.

WARRANTY

- ALL MATERIALS AND WORKMANSHIP ARE WARRANTED FOR A PERIOD OF ONE YEAR FROM THE DATE OF COMPLETION.

MAINTENANCE

- NONE REQUIRED