


A Standard Assembly



B Standard Horizontal Section

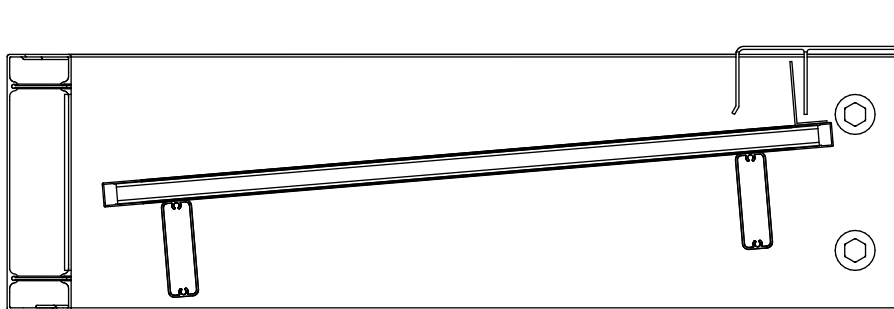

Product: CARIBBEAN (CA)

Aluminum Sunshade

STANDARD CONSTRUCTION

- **INTERMEDIATE OUTRIGGERS:**
8" x 1/4" (RFB-BLOCKED) ALUMINUM (5052-H32)
(CUSTOM SHAPES AND SIZES AVAILABLE)
- **FASCIA & END OUTRIGGERS:**
2" x 8" x .080" INTER-LOCKING TUBE
EXTRUDED ALUMINUM (6063-T6)
(CUSTOM SHAPES AND SIZES AVAILABLE)
- **INFILL:**
STANDARD 16MM MULTI-WALL POLYCARBONATE
(CUSTOM PROFILES AND COLORS AVAILABLE)
- **WALL BRACKETS:**
6061-T6 EXTRUDED ALUMINUM
ELASTOMERIC COATING ON WALL FACING SURFACE
(CUSTOM BRACKETS AVAILABLE)
- **FINISH:**
ARCHITECTURAL POWDER COAT (RAL COLORS)
(ANODIZED AND KYNAR FINISHES AVAILABLE)
- **SITE SPECIFIC ENGINEERING:**
AVAILABLE UPON REQUEST

INSTALLATION

- CARIBBEAN SERIES ALUMINUM SUNSHADES SHOULD BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS RECOMMENDED ATTACHMENT METHOD AND IN ACCORDANCE WITH STATE AND FEDERAL BUILDING CODES.

WARRANTY

- ALL MATERIALS AND WORKMANSHIP ARE WARRANTED FOR A PERIOD OF ONE YEAR FROM THE DATE OF COMPLETION.

MAINTENANCE

- NONE REQUIRED